

# Use and Maintenance

## - SC5000

ATTENTION! Do not use the machine before you have read and understood the User Manual



1. Check the battery charge gauge (and if necessary re-charge)




2. E-stop icon that appears on display when E-stop switch is engaged. Twist E-stop switch to enable machine function




3. Check battery cables are well connected together




4. Recovery tank seal cover must correctly installed and in good condition

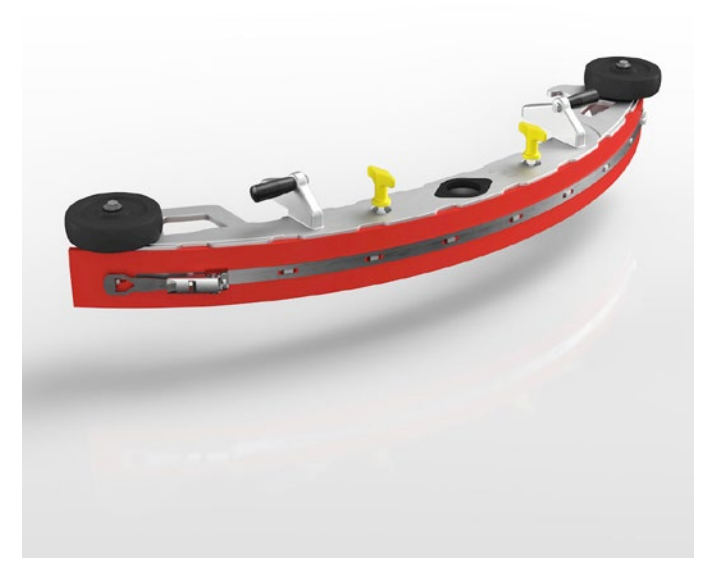

5. Inspect the squeegee blades for cuts or chunks

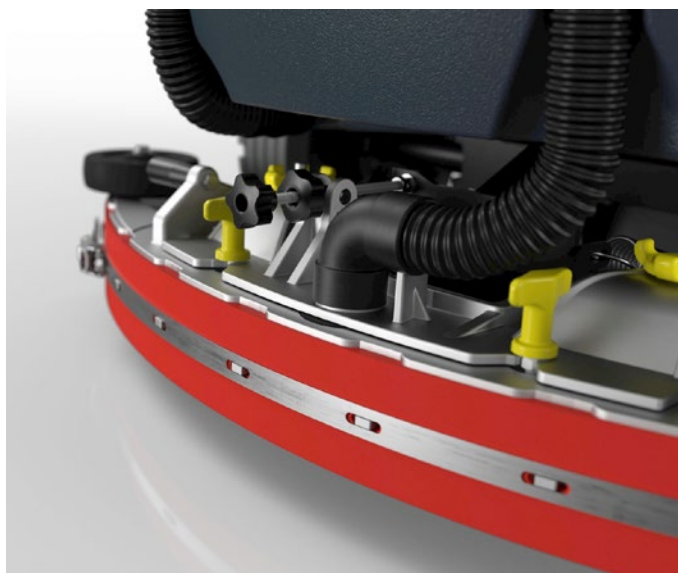


6. Install squeegee

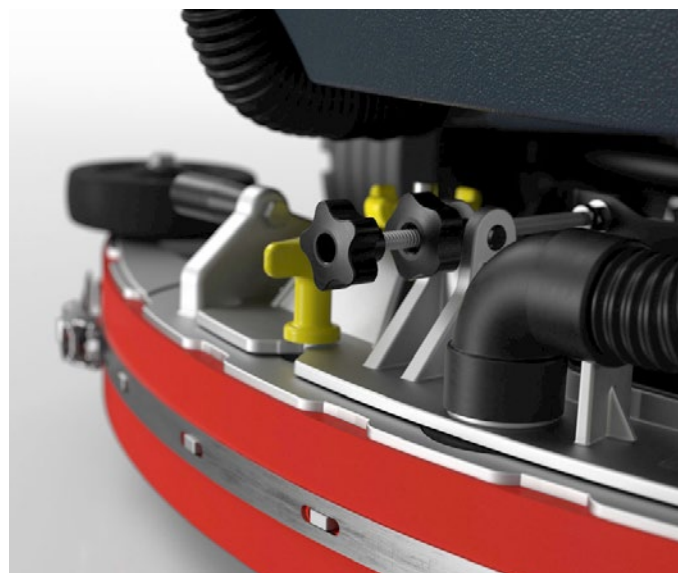

7. Check the height of the squeegee by adjusting the castor wheels and the angle knob.



8. Open broom door compartment and check presence of ropes or debris that can block it.

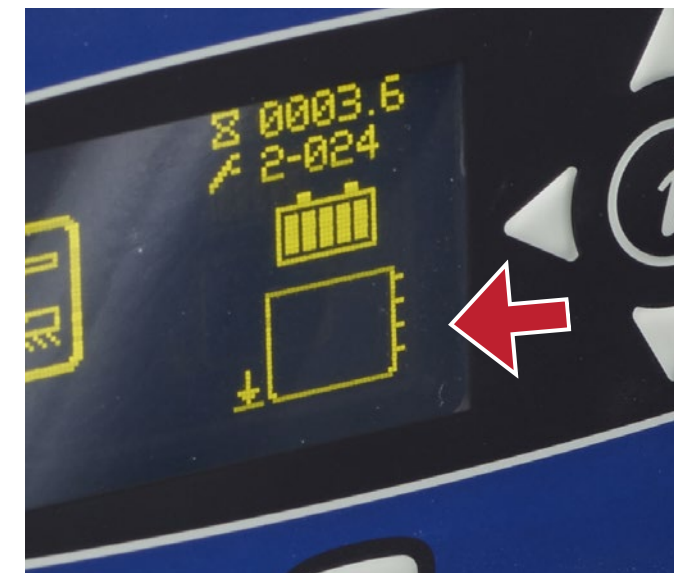

9. Check presence of water in the solution tank.




10. If necessary open the solution filter cage and clean the net.



11. Install Brushes.



12. Adjust side skirts height

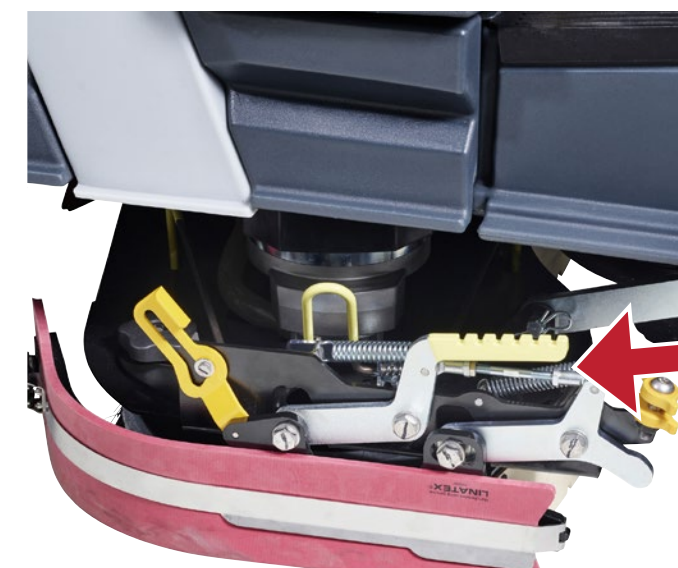

13. Lift side skirts when double scrubbing is needed



14. Make sure that deck and squeegee are moving down when pressing the button.



15. Adjust water flow.



16. Adjust detergent flow.



17. Press "I" scroll down to faults and press ">" button to view faults

If the machine has been used until the Red light illuminates on the battery level indicator on the machine, a full recharge of the batteries (10-12 hours) will be required. Failure to carry out this procedure may cause damage to the batteries. Charging the batteries after every use is recommended.

PLEASE ENSURE RED SOCKET IS LEFT DISCONNECTED AFTER RECHARGE IF THE MACHINE IS NOT TO BE USED ON A DAILY BASIS

# Troubleshooting

## - SC5000

ATTENTION! Do not use the machine before you have read and understood the Instructions for User Manual

The machine doesn't work as it should?



1 Check battery charge gauge.



2 E-stop icon that appears on display when E-stop switch is engaged. Twist E-stop switch to enable machine function



3 Check battery cables are well connected together.




4 Recovery tank seal cover must correctly installed and in good condition.


The suction doesn't work as it should?



1 Check if the suction hose is correctly installed and cleaned.

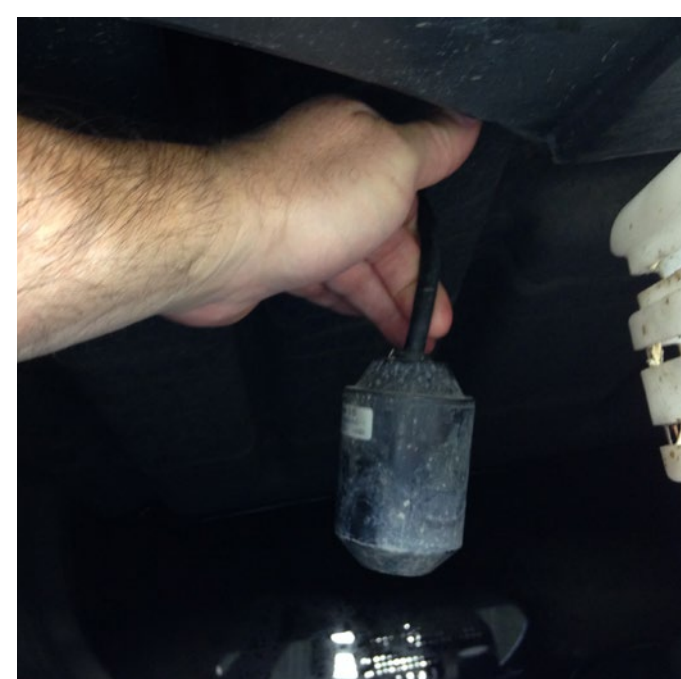

2 Inspect recovery tank float switch operation

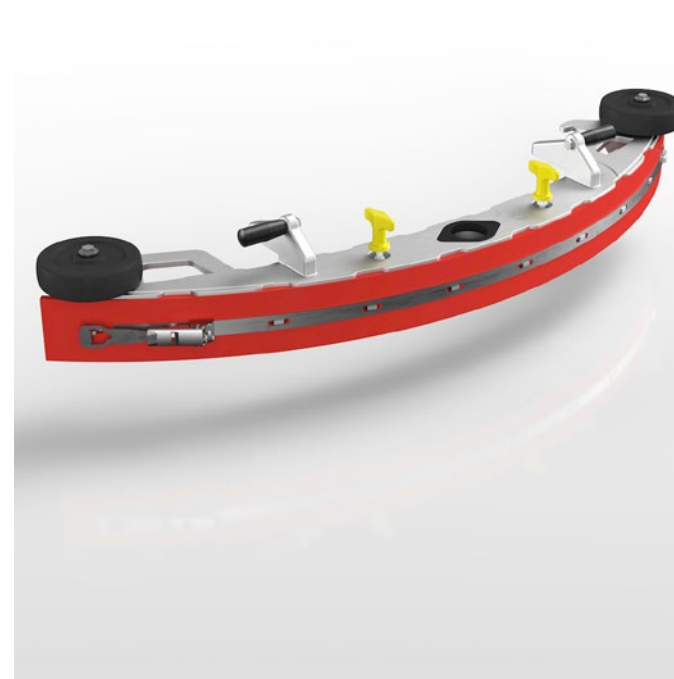

3 Check if squeegee blades are damaged or dirty.




4 Close the recovery tank cover properly and/or verify the gasket wear.

The machine doesn't clean as it should?



1 Check if you have the right water settings.

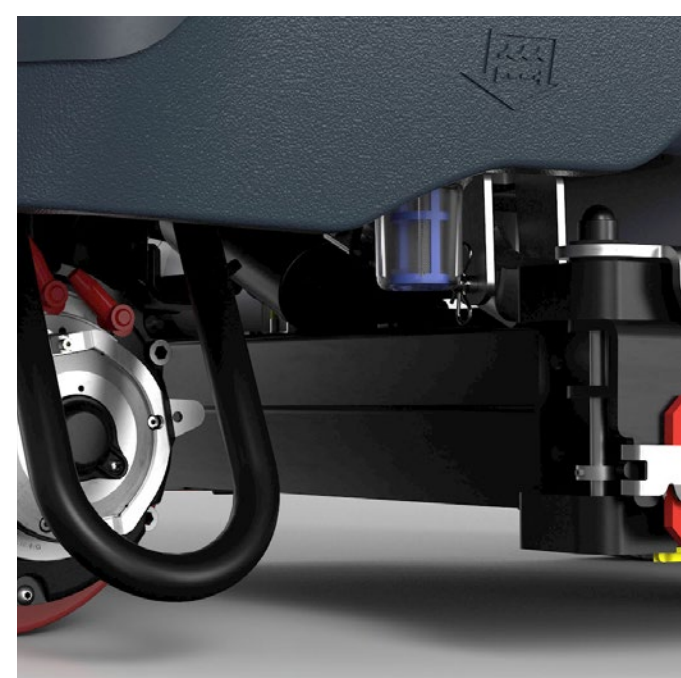

2 Check if the solution tap is open.



3 Check if the solution filter is cleaned.

The brush don't work as they should?



1 Remove side skirt assembly and verify brush installation and condition



2 Press "I" scroll down to faults and press ">" button to view faults



3 Check if there are external materials avoiding brush rotating.